

Typical Lock

Cross Section

'Clinching Machine'

Fastest, simplest way to fasten sheet metal!


Eliminates spot welding & riveting!

Fasten 2 Pieces of Mild Steel, Galvanized, Pre-Painted, or Aluminum 28 Ga. To 14 Ga. Thickness

- Simple Construction for Easy Gauge Adjustment
- Most Efficient Design on the Market (Lowest Power Consumption)
- Low Maintenance
- Uses Standard Tooling
- Laser Punch Locator (Included)
- Safety Down Stroke Control
 Eliminates Excessive Guarding
- 1 Year Warranty
- Air Operated: Plug Into Shop Air, 80 100 PSI
- Standard Safety Features

Available Models:

| Model Number | Throat Depth | Material Thickness |
|-----------------|-----------------|-----------------------|
| DFTL - 303 | 30" | 28 - 14 Ga. |
| DFTL - 263 | 26" | 28 - 14 Ga. |
| DFTL - 143 | 14" | 28 - 14 Ga. |

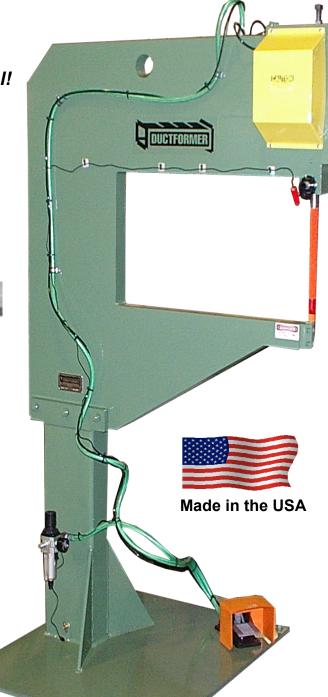

3991 Green Park Rd. St. Louis, MO 63125 Phone ~ 314.631.1416 Fax ~ 314.631.3003

DUCTFOR